


半间距型联轴器 / 尺寸—毫米

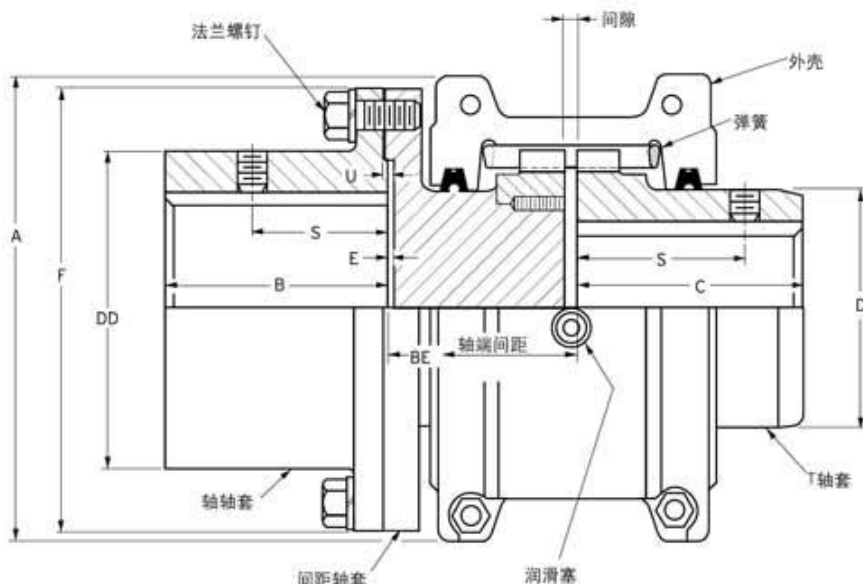

规格	额定 扭矩	许用 转速	最大孔径 mm ●		最小 孔径	联轴器重量 无孔 & 最小 BE	BE 每 mm 加长 联轴器 增量	润滑油 重量	尺寸—毫米														
									BE				S				U	间隙	法兰螺钉 螺钉数量 & 等级	直径 英寸			
			轴套	T 轴套					A	B	C	D	DD	E	F	S							
																Min					Max	轴套	T 轴套
1020T	52	3,600	35	28	13	2.89	0.010	0.0272	97.0	34.9	45.2	102	47.6	39.7	52.4	0.8	85.7	27.4	39.1	1.8	3	4-Gr8	250
1030T	149	3,600	43	35	13	3.89	0.016	0.0408	105.7	41.3	45.2	109	47.6	49.2	59.5	0.8	93.7	31.5	39.1	1.8	3	8-Gr6	250
1040T	249	3,600	56	43	13	5.88	0.021	0.0544	114.3	54.0	45.2	109	50.8	57.2	78.6	0.8	112.7	27.4	40.1	1.8	3	8-Gr8	250
1050T	435	3,600	67	50	13	9.12	0.028	0.0680	135.1	60.3	56.3	109	60.3	66.7	87.3	0.8	125.4	40.6	44.7	1.8	3	8-Gr8	312
1060T	684	3,600	80	56	20	13.9	0.037	0.0862	147.8	73.0	61.9	166	63.5	76.2	103.2	1.8	144.5	43.2	52.3	2.8	3	8-Gr8	375
1070T	994	3,600	85	67	20	17.6	0.048	0.113	158.8	79.4	64.3	166	76.2	87.3	109.5	1.8	152.4	46.7	53.8	2.8	3	12-Gr8	375
1080T	2,050	3,600	95	80	27	28.9	0.069	0.172	190.5	88.9	78.6	204	88.9	104.8	122.2	1.8	177.8	49.8	64.5	2.8	3	12-Gr5	500
1090T	3,730	3,600	110	95	27	42.8	0.10	0.254	211.1	101.6	82.6	204	98.4	123.8	142.9	1.8	209.6	56.9	71.6	2.8	3	12-Gr5	625
1100T	6,280	2,440	130	110	42●	66.1	0.12	0.426	251.0	90.4	103.2	205	120.6	142.1	171.4	1.6	250.8	— — —	— — —	3.0	5	12-Gr5	750
1110T	9,320	2,250	150	120	42●	84.6	0.16	0.508	269.7	104.1	106.4	205	127.0	160.3	196.8	1.6	276.2	— — —	— — —	3.0	5	12-Gr5	750
1120T	13,700	2,025	170	140	61●	129	0.20	0.735	307.8	119.4	124.6	205	149.2	179.4	225.4	1.6	319.1	— — —	— — —	4.0	6	12-Gr5	875
1130T	19,900	1,800	190	170	67●	179	0.29	0.907	345.9	134.6	130.1	205	161.9	217.5	238.1	1.6	346.1	— — —	— — —	4.0	6	12-Gr5	1,000
1140T	28,600	1,650	210	200	67●	252	0.40	1.130	384.0	152.4	134.9	205	184.2	254.0	266.7	1.6	358.8	— — —	— — —	4.0	6	12-Gr5	1,125

表 7-T35 半间距联轴器标准库存间距长度

[illegible]

• 为了在拆卸联轴器时不移动设备，选择半间距轴套 BE 长度应大于 B 尺寸，最大尺寸请咨询莱克斯诺工业。